


TO: _____ ATNN: _____ FROM: _____ DATE: _____

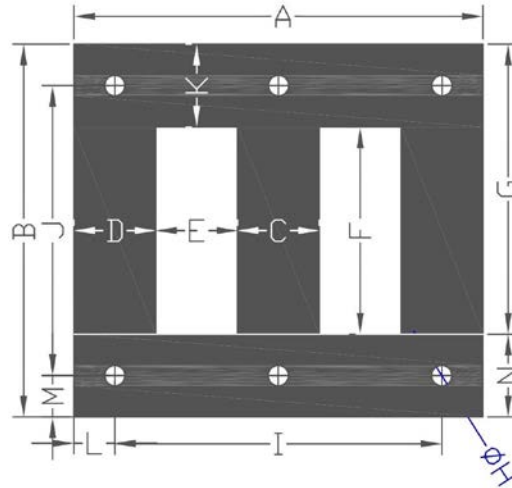

E I 矽鋼片規格表

單位: m/m

Ver:105.5

材質等級

		C - A 距	A	B	C	D	E	F	G	H Ø	I	J	K	L	M	N	50H50	50H18	35H18	35H9
三 相	12.7 - 69.8	69.85	66.75	12.72	12.72	15.85	35.05	50.9	3.95(4H)	61.85	50.9	15.85	3.95	7.93	15.85					
	22 - 122	122.2	116.7	22.2	22.2	27.8	61.1	88.9	6(4H)	100	88.9	27.8	11.1	13.9	27.8					
	30 - 152	152.4	137.2	30.5	30.5	30.5	76.2	106.7	7.5(6H)	121.9	106.7	30.5	15.25	15.25	30.5					
	38 - 190	190	171	38	38	38	95	133	9(6H)	152	133	38	19	19	38					
	45 - 228	228	205.2	45.6	45.6	45.6	114	159.6	9.5(6H)	182.4	159.6	45.6	22.8	22.8	45.6					
	52 - 265	265	241.5	52	52	54.5	132.5	187	10(6H)	213	187	54.5	26	27.25	54.5					
	61 - 305	305	274.5	61	61	61	152.5	213.5	10.3(6H)	244	213.5	61	30.5	30.5	61					
	68 - 350	350	321	68	68	73	175	248	12.7(6H)	282	248	73	34	36.5	73					
	75 - 385	385	352.5	75	75	80	192.5	272.5	15(6H)	310	272.5	80	37.5	40	80					
87 - 450	450	414	87	87	94.5	225	319.5	15(6H)	363	319.5	94.5	43.5	47.25	94.5						
高 壓	27 - 92	92	109.6	27	15	17.5	76.4	93	5.5(4H)	77	93	16.6	7.5	8.3	16.6					
	35 - 108	108	181	35	16	20.5	149	165	6(4H)	92	165	16	8	8	16					
	32 - 113	112.8	128.6	31.8	17.5	23	93.6	111.1	6(4H)	95.3	111.1	17.5	8.75	8.75	17.5					
	35 - 133	133.2	146.2	34.8	22.2	27	101.8	124	7(4H)	111	124	22.2	11.1	11.1	22.2					
	41 - 146	146	158.8	41.2	23.8	28.6	111.2	135	7(4H)	122.2	135	23.8	11.9	11.9	23.8					
	54 - 181	181	201.6	53.9	30.2	33.35	141.2	171.4	7.2(6H)	150.8	171.4	30.2	15.1	15.1	30.2					
	55 - 190	190	165	55	32.5	35	95	130	10(6H)	157.5	130	35	16.25	17.5	35					
	66 - 210	210	286	66	34	38	210	248	8(6H)	176	248	38	17	19	38					
45 - 228	228	319.2	45.6	45.6	45.6	228	273.6	9(6H)	182.4	273.6	45.6	22.8	22.8	45.6						
63 - 228	228	203.1	63	31.7	50.8	139.7	171.4	9.5(6RH)	202.5	≠	31.7	12.75	12.75	31.7						
61 - 305	305	427	61	61	61	305	366	10.3(6H)	244	366	61	30.5	30.5	61						
75 - 385	385	545	75	75	80	385	465	15(6H)	310	465	80	37.5	40	80						